


Datum: 08.12.2025

Davčna št.: SI35517140
Telefon: 041 596 992
E-mail: info@piara.net
WWW: www.piara.net

Osnovna plošča 1700 GigaByte B760M DS3H GEN5 microATX VGA HDMI 2xDisplayPort

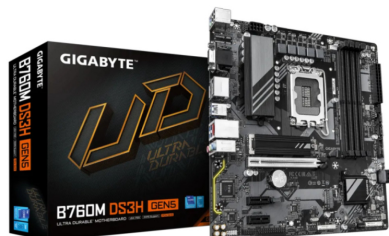

Kategorija: [Osnovne plošče](#)
Šifra:

Redna cena z DDV: **183,49 €**
Cena s popustom z DDV: **154,04 €**

Na zalogi

(slika je simbolična)

PODNOŽJE: INTEL LGA 1700

ZA PROCESORJE: 14/13/12 Generation Core i7/i5/i3/Pentium/Celeron

FORMAT: micro ATX format 24.4 cm x 24.4 cm

VEZNI ČIP: INTEL B760

POMNILNIK:

4 x DDR5 DIMM ECC/non-ECC 7600(O.C.) /7400(O.C.) /7200(O.C.)
/7000(O.C.) /6800(O.C.) /6600(O.C.) / 6400(O.C.) / 6200(O.C.) /
6000(O.C.) / 5800(O.C.)/ 5600/5200/4800/4400MHz) do skupno 256GB
kapacitete, dual channel in XMP podpora

GRAFIKA: DA - preko CPU

RAID: RAID 0, RAID 1, RAID 5, and RAID 10 podpora SATA storage

RAZŠIRITVENE REŽE:

CPU:

- 1 x PCI Express x16 slot, supporting PCIe 5.0 and running at x16
The PCIe x16 slot can only support a graphics card or an NVMe SSD

Chipset:

- 2 x PCI Express x1 slots, supporting PCIe 3.0 and running at x1

MREŽNA KARTICA: Realtek 2.5GbE LAN chip

ZVOČNA KARTICA: Realtek codec High Definition Audio (2/4/5.1/7.1-

channel)

NOTRANJI PRIKLJUČKI:

- 1 x 24-pin ATX main power connector
 - 1 x 8-pin ATX 12V power connector
 - 1 x CPU fan header
 - 3 x system fan headers
 - 2 x addressable RGB Gen2 LED strip headers
 - 1 x RGB LED strip header
 - 2 x M.2 Socket 3 connectors
 - 4 x SATA 6Gb/s connectors
 - 1 x front panel header
 - 1 x front panel audio header
 - 1 x USB 3.2 Gen 1 header
 - 2 x USB 2.0/1.1 headers
 - 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0/GC-TPM2.0 SPI V2 module only)
 - 1 x serial port header
 - 1 x parallel port header
 - 1 x S/PDIF Out header
 - 1 x Q-Flash Plus button
 - 1 x reset jumper
 - 1 x Clear CMOS jumper
- ZUNANJI PRIKLJUČKI:**
- 2 x USB 2.0/1.1 ports
 - 1 x PS/2 keyboard/mouse port
 - 1 x D-Sub port (Note

Specifikacije

Procesor Intel 1700
Ram DDR5

)

1 x HDMI port (Note)

2 x DisplayPorts (Note)

3 x USB 3.2 Gen 1 ports

1 x USB Type-C port, with USB 3.2 Gen 2 support

1 x RJ-45 port

3 x audio jacks

DODATNO:

iTE I/O Controller Chip

H/W Monitoring

Voltage detection

Temperature detection

Fan speed detection

Water cooling flow rate detection

Fan fail warning

Fan speed control

BIOS

1 x 128 Mbit flash

Use of licensed AMI UEFI BIOS

PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0

Unique Features

Support for GIGABYTE Control Center (GCC)

Support for Q-Flash

Support for Q-Flash Plus

Support for Smart Backup

Bundled Software

Norton Internet Security (OEM version)

Uradna stran proizvajalca: <https://www.gigabyte.com/Motherboard/B760M-DS3H-GEN5#kf>
